

**SUPPLY**  
24VDC

**RELAYS**  
CONTACT RATING  
6A @ 250VAC.

MINIMUM SWITCHING LOAD  
500mW (12V/10mA).

COIL TO CONTACT INSULATION  
6kV.



TOTAL POWER CONSUMPTION  
1.4W MAX.

RELAY LED'S  
GREEN LIT WHEN RELAYS  
ARE ENERGISED

POWER LED  
GREEN LIT WHEN UNIT  
IS OPERATIONAL

OPERATING TEMPERATURE  
-20°C TO +65°C

**NOTE:-**  
IF UNIT IS LOCALLY POWERED  
VIA TB2 THEN THE SUPPLY  
LINK ON THE BACK OF THE  
RACK MUST BE REMOVED.

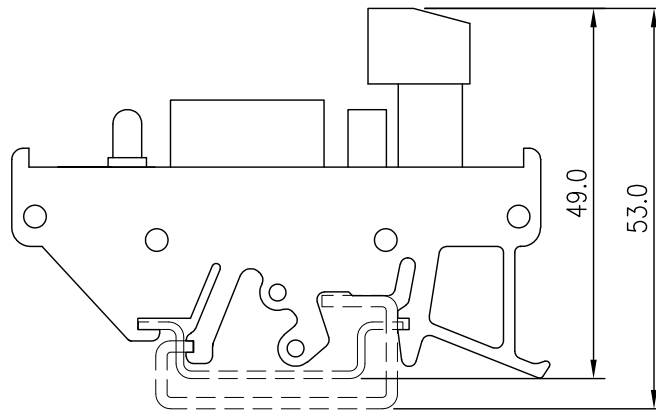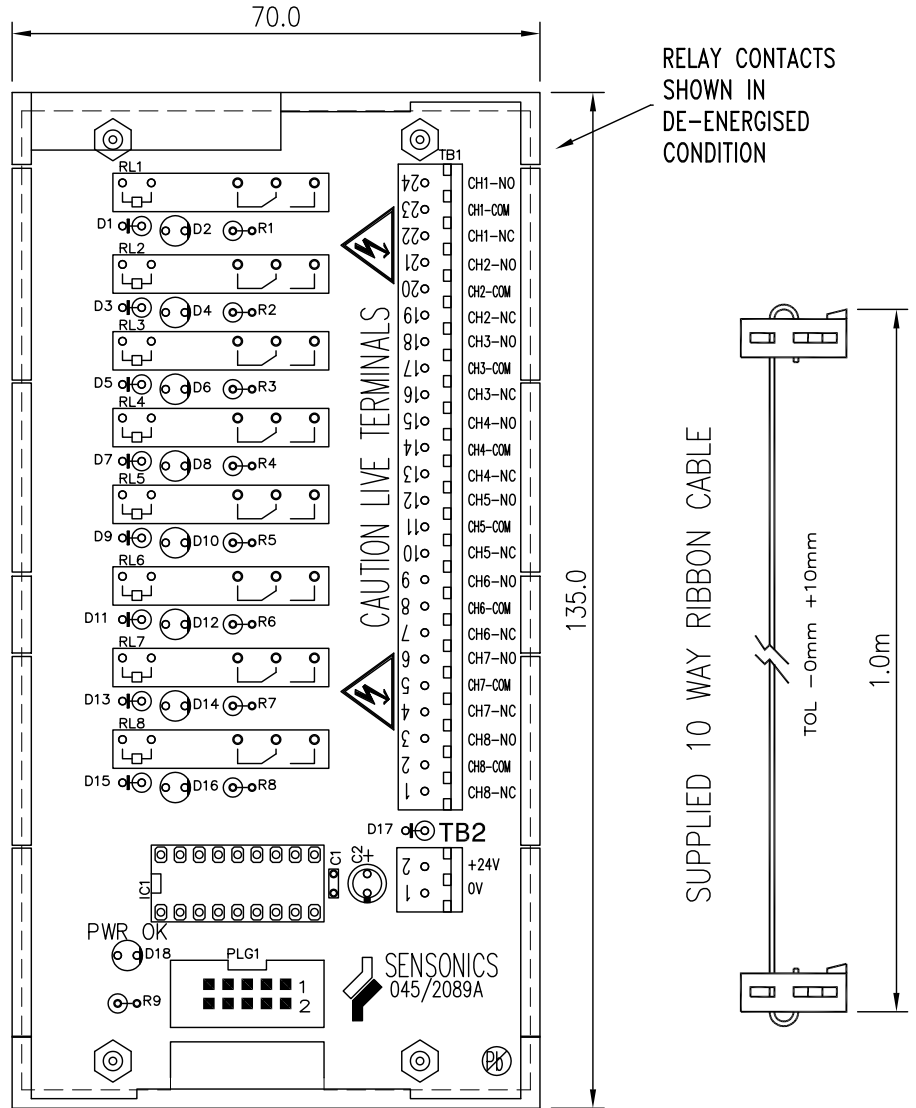

FOR PARTS LIST SEE 046/5861A/4  
FOR ASSEMBLY SEE EA3532A

TS32 OR TS35 DIN RAIL MOUNTING

ISSUE	DATE	CN. No.	MOD'BY	CHECKED

CHANGE NOTES

PROJ.ENG. D.SIPOS	SCALE 1:1
DRAWN D.WELBOURN	DIM'NS mm
CHECKED D.SIPOS	DATE 20.1.2010
CUST.REF. 10335	SHEET No. SHT 1 OF 1

	NORTHBRIDGE ROAD, BERKHAMSTED, HERTS, HP4 1EF, ENGLAND Tel : +44 (0)1442 876833 Fax : +44 (0)1442 876477	
	TITLE SENTRY G3 8 RELAY EXPANSION CARD HOUSED IN RAFT COMPLETE WITH 1m CABLE	
THIS DOCUMENT IS SUBJECT TO THE CONDITIONS IN THE ENCLOSED MEMO DS 742	DRAWING No. <b>IS.4031/2</b>	ISSUE <b>1</b>